# 

### **FEATURES**

- Modern, sleek design
- Touch-free; senses 50-120mm below blower
- High RPM with low noise to dry hands quickly
- 105 centigrade thermal cut-off


- Easy to mount and install
- To avoid wastage of power, this dryer has been set with power-on function after 0.5 seconds and automatically powers-off after 1 minute
- Drying time is 15-25 seconds

### **INSTALLATION**

#### TECHNICAL DATA

VOLTAGE	220-240V/50-60HZ
RATED POWER	1200W
SENSOR RANGE	50~120MM
WIND SPEED	>110 M/S
AIR TEMPERATURE	> 5 4 ° C
DRYING TIME	15-258
NET WEIGHT	3.5KGS
DIMENSIONS	W320 X D293 X H175
WATERPROOF PROTECT	I P X 1
ELECTRIC SHOCK PROTECT	CLASS II

#### POWER DIAGRAM



### NOTICE


- Do not block or jam the blower
- In the unlikely event of a breakdown, please cut-off the power immediately and contact the seller for more information
- Do not place flammable materials close to, or touching the dryer (including the wall the dryer is installed on)
- Although screw fixings are supplied, the manufacturer takes no responsibility for fixing issues regarding walls which may be deemed unsuitable (check with the manufacturer if in doubt)
- Only to be installed by a qualified electrician

### **CLEANING INSTRUCTIONS**

- Do not attempt to dismantle the dryer when cleaning
- Only use a damp, clean cloth to wipe the surface of the dryer and pat-dry with a towel
- Do not use abrasive materials or cleaning agents containing chlorine

## INSTALLATION

Fig 1: Installation Diagram

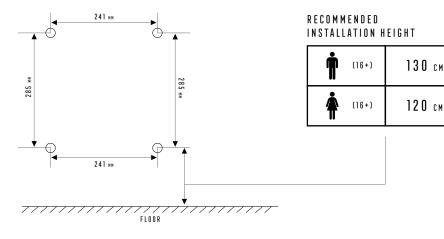

- Drill 4 holes into wall as per Fig. 1 then insert expansion plugs into hole
- Remove grub screws from the sides of the hand dryer
- Remove the dryer front cover detach earth cable
- Fix the hand dryer to wall using enclosed screws
- Replace cover and tighten grub screws